




001 Igloo

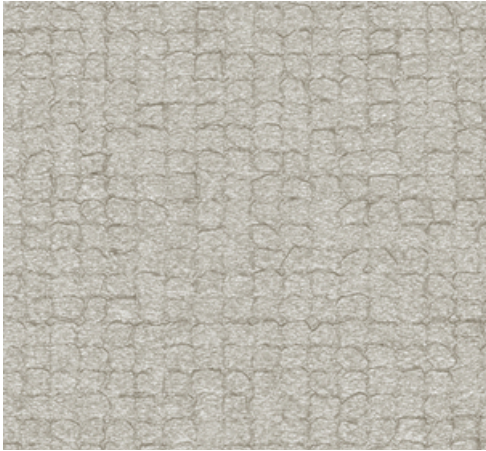


002 Pier

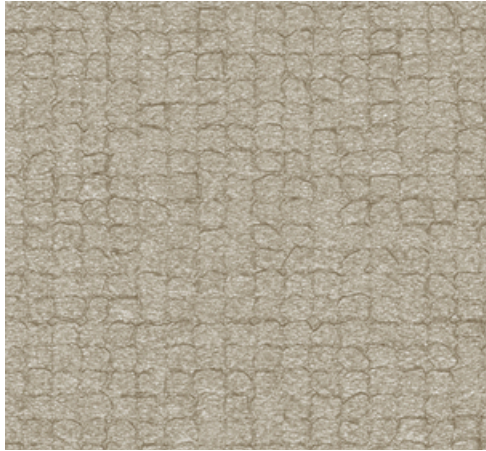


003 Scroll

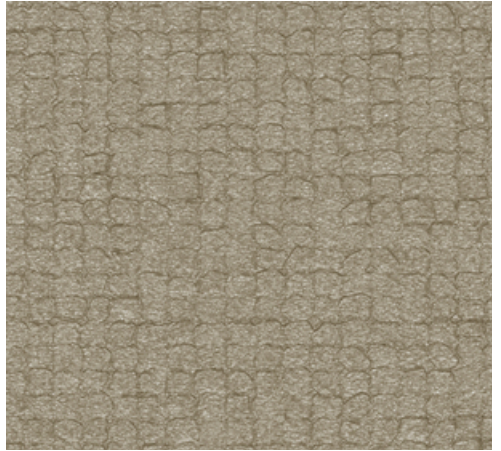


004 Doeskin

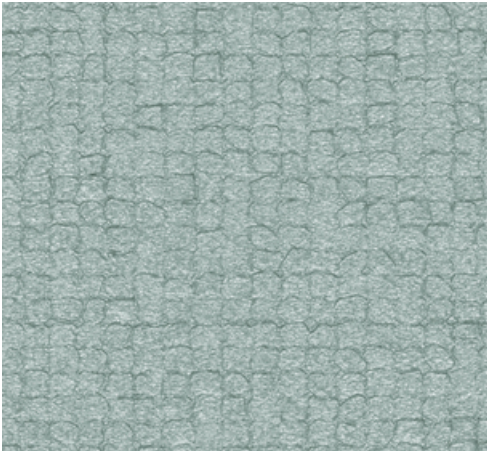


005 Opal

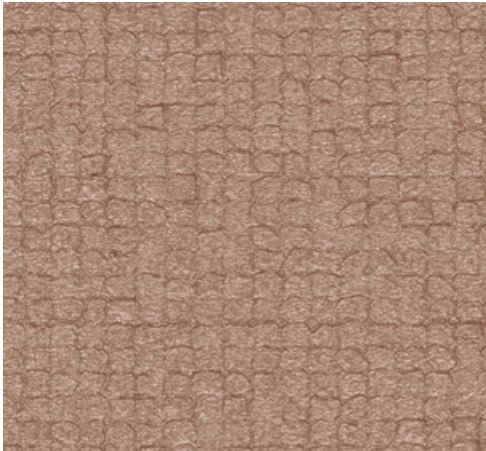


006 Quartz

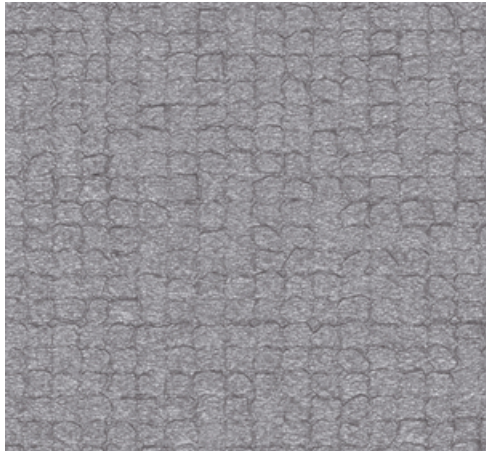


007 Mosaic

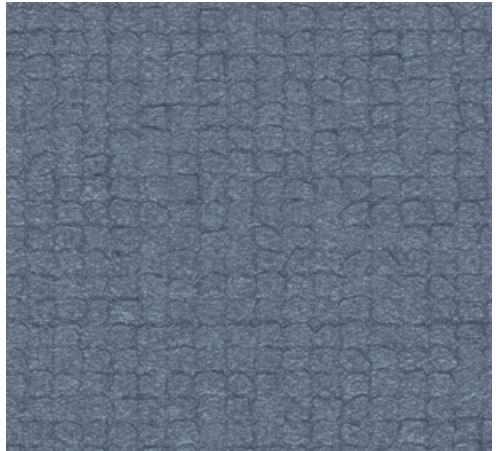


008 Bluestone

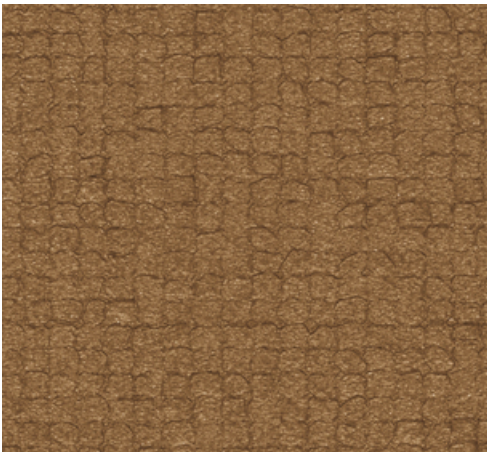


009 Penny

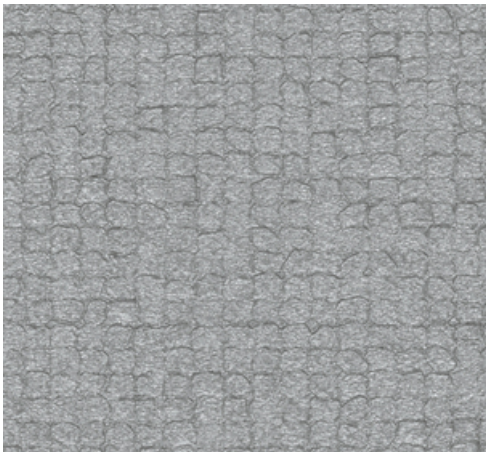

010 Artifact

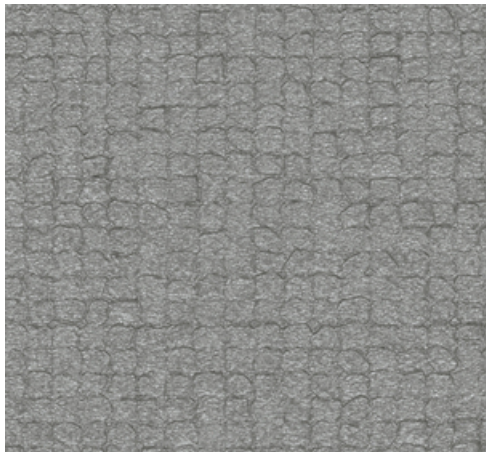

011 Wolf

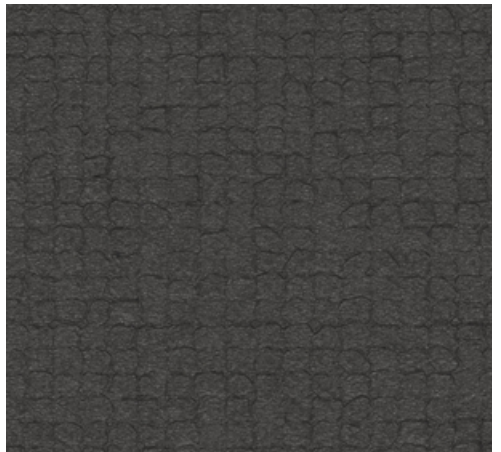

012 Basalt



Application

Walls

Characteristics

Content: 100% Vinyl  
Finish: PFAS-Free Protective Topcoat  
Backing: Polyester/Cotton Osnaburg  
Width: 50" (127cm)  
Bolt Size: 33 yards (30 m)  
Class: Type II  
Weight: 20 oz/ly (600 gr/lm)  
Traffic: High Traffic  
Country of Origin: Great Britain  
Note on Mold: Intended for use in buildings designed and maintained to avoid moisture on or within walls.  
Application must conform to current Installation Guidelines included in each shipment or available at maharam.com.

Price

\$30.50 / C\$50.09 (FOB destination)  
C\$43.75 (FOB origin)

Testing

Flammability: ASTM E84 Adhered  
CAN ULC S102 Adhered  
  
Lightfastness: AATCC 16.3, 200+ hours  
☀️🔥💧🌟

Maintenance

W-Clean with water-based cleanser.

Environmental

Free of Intentionally Added PFAS

Warranty

10 years. See Terms and Conditions for more information.

© 2020 Knoll, Inc.

Last updated August 2, 2025