



001 Thesis



002 Omega

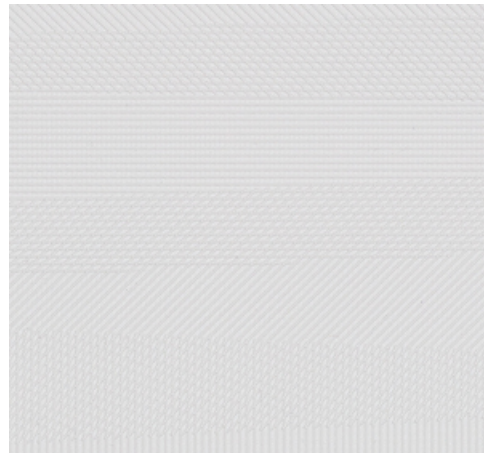

003 Mute

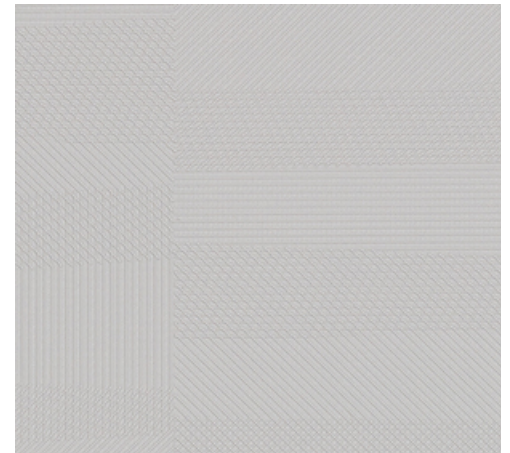

004 Winter




005 Panther



007 Token




008 Revive

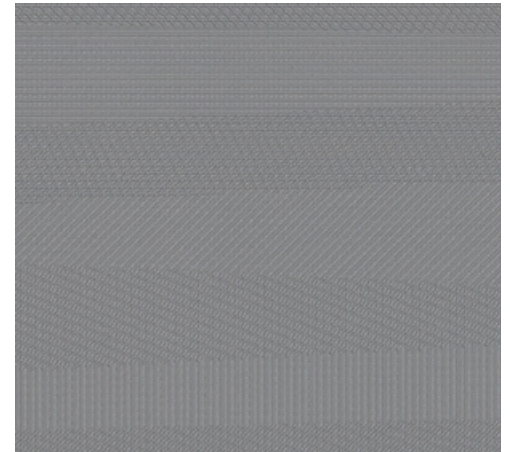


010 Zen




011 Gravity

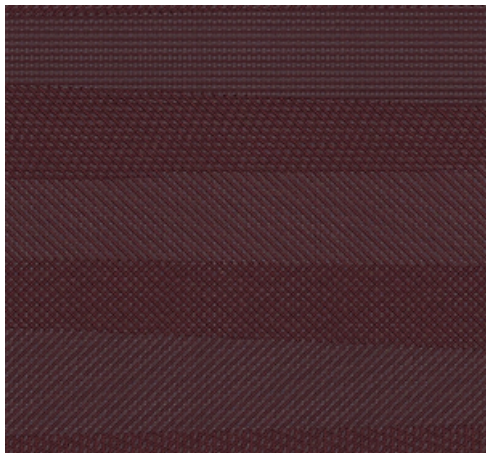

013 Horizon

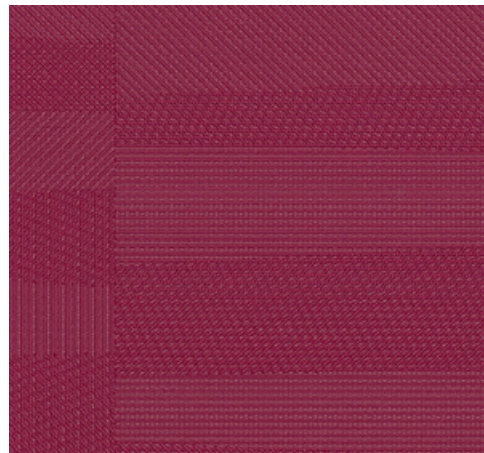

014 Tropic

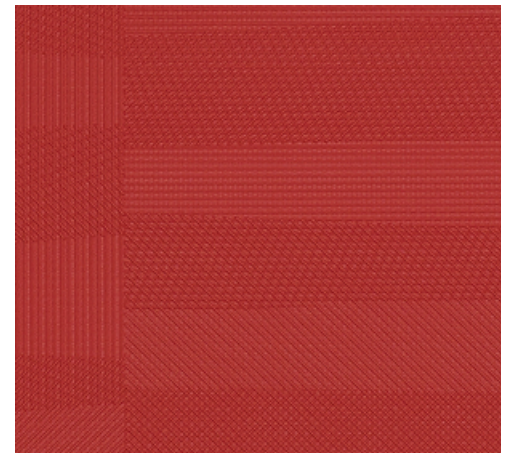

015 Lipstick

399964 Gait

maharam

Application

Walls

Characteristics


Content: 100% Non-Phthalate Vinyl
Finish: Protective Topcoat
Backing: Cotton Osnaburg
Width: 51" (130cm)
Repeat: Non-match
Bolt Size: 30 yards (27 m)
Class: Type II
Weight: 25 oz/ly (800 gr/lm)
Traffic: High Traffic
Country of Origin: USA
Note on Mold: Intended for use in buildings designed and maintained to avoid moisture on or within walls.
Application must conform to current Installation Guidelines included in each shipment or available at maharam.com.

Price


\$35.00 / C\$53.50 (FOB destination)
C\$50.00 (FOB origin)

Testing

Flammability: ASTM E84 Adhered
CAN ULC S102 Adhered
GB 8624 Adhered*
*passes with additional treatment

Lightfastness: AATCC 16.3, 200+ hours


Maintenance

W-Clean with water-based cleanser.


Environmental

FR Free
Free of Intentionally Added PFAS

Warranty

10 years. See Terms and Conditions for more information.

© 2017 Maharam

Last updated June 19, 2025