




001 Dorsal

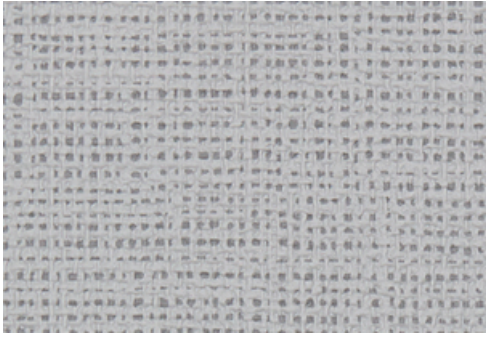

002 Goblet

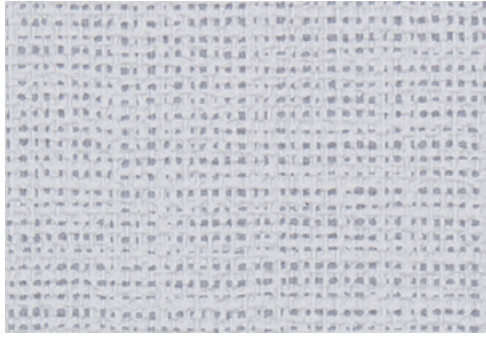


003 Griseous

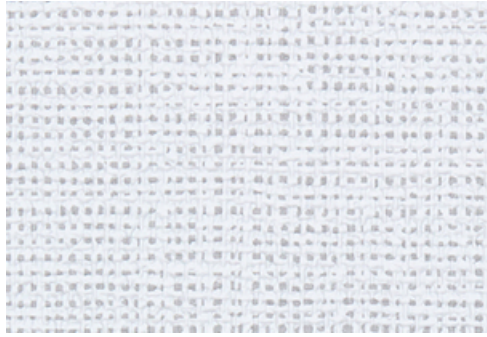

004 Whitewash




005 Cream

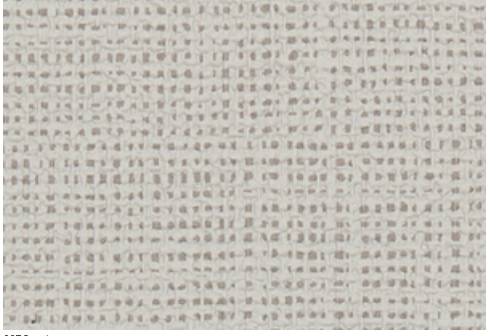


007 Frontier




008 Weave

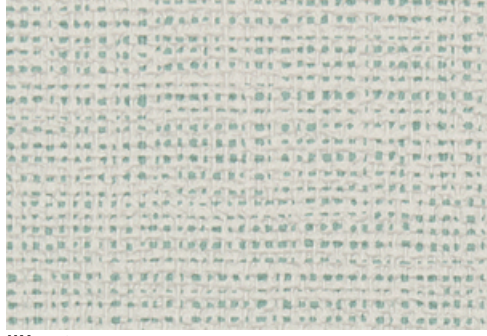


009 Propagate

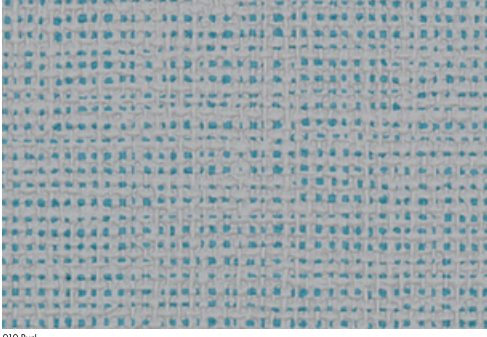


010 Purl

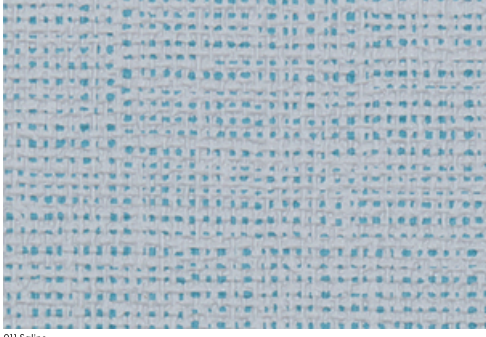


011 Saline

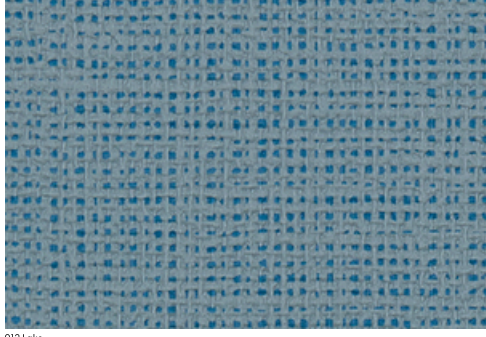


012 Lake

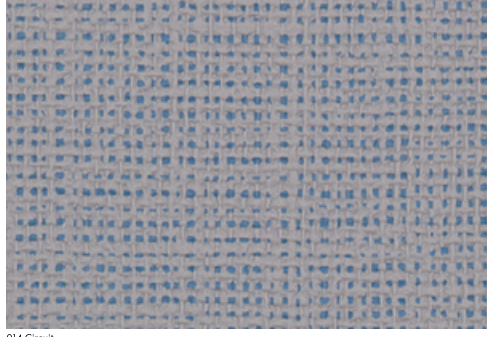


014 Circuit

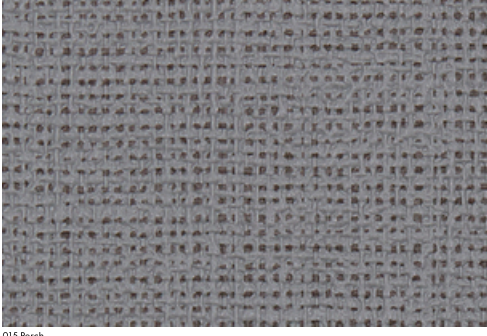

015 Perch

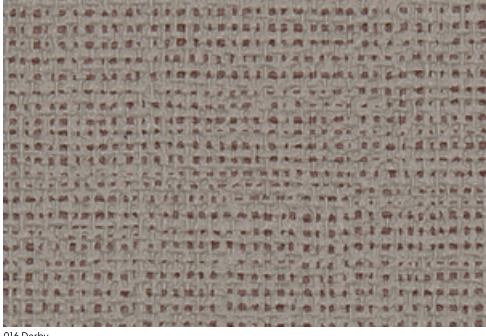

016 Derby

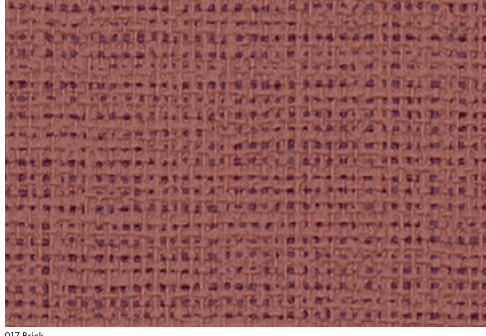

017 Brick

Application

Walls

Characteristics

Content: 100% Non-Phthalate Vinyl  
Finish: None (Impermeable)  
Backing: Polyester/Cotton Osnaburg  
Width: 54" (137cm)  
Repeat: Non-match  
Bolt Size: 30 yards (27 m)  
Class: Type II  
Weight: 20 oz/ly (600 gr/lm)  
Traffic: High Traffic  
Country of Origin: USA  
Note on Mold: Intended for use in buildings designed and maintained to avoid moisture on or within walls.  
Application must conform to current Installation Guidelines included in each shipment or available at maharam.com.

Price


\$24.75 / C\$39.00 (FOB destination)  
C\$35.50 (FOB origin)

Testing

Flammability: ASTM E84 Adhered  
BS 476 Adhered\*  
EN 13501 Adhered\*  
GB 8624 Adhered\*  
\*passes with additional treatment

Lightfastness: AATCC 16.3, 200+ hours  


Maintenance

W/B-Clean with water-based cleanser or diluted household bleach.  


Environmental

FR Free  
Free of Intentionally Added PFAS  
Non-Phthalate Vinyl

Warranty

10 years. See Terms and Conditions for more information.

© 2017 Maharam

Last updated June 16, 2025