



001 Brindle



003 Geode



004 Pale



005 Frieze



006 Alpaca




011 Natrix




012 Melon



013 Spearmint

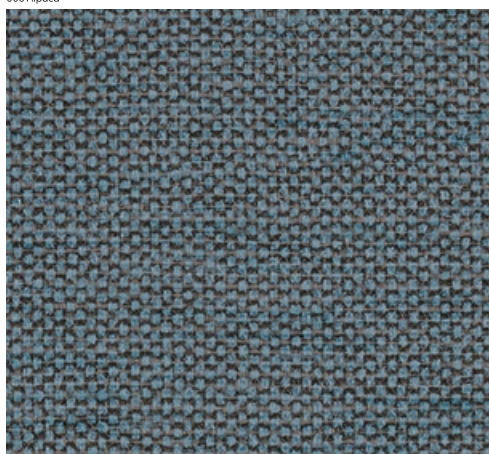


014 Dragonfly

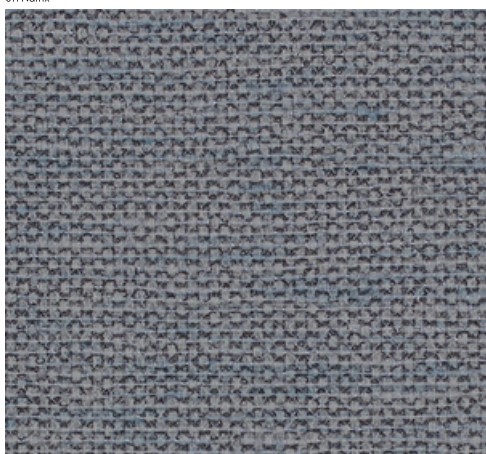

015 Riverbend



016 Nutria

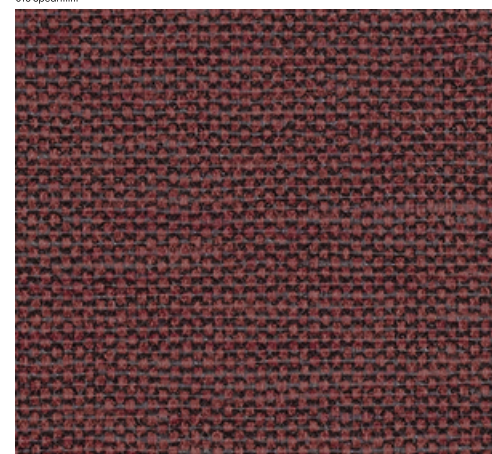

017 Jasper

Application

Walls

Characteristics

Content: 100% Non-Phthalate Vinyl
Finish: PFAS-Free Protective Topcoat
Backing: Polyester/Cotton Osnaburg
Width: 54" (137cm)
Bolt Size: 30 yards (27 m)
Class: Type II
Weight: 20 oz/ly (600 gr/lm)
Traffic: High Traffic
Country of Origin: USA
Note on Mold: Intended for use in buildings designed and maintained to avoid moisture on or within walls.
Application must conform to current Installation Guidelines included in each shipment or available at maharam.com.

Price

\$31.50 / C\$48.50 (FOB destination)
C\$45.00 (FOB origin)

Testing

Flammability: AS/NZS 3837 Adhered
ASTM E84 Adhered
BS 476 Adhered*
CAN ULC S102 Adhered
EN 13501 Adhered*
GB 8624 Adhered*
*passes with additional treatment

Lightfastness: AATCC 16.3, 200+ hours



Maintenance

W/B-Clean with water-based cleanser or diluted household bleach.



Environmental

Greenguard Certified
FR Free
Free of Intentionally Added PFAS
Non-Phthalate Vinyl

Warranty

10 years. See Terms and Conditions for more information.

© 2017 Maharam

Last updated August 21, 2025