





001 Alabaster



002 Enamel

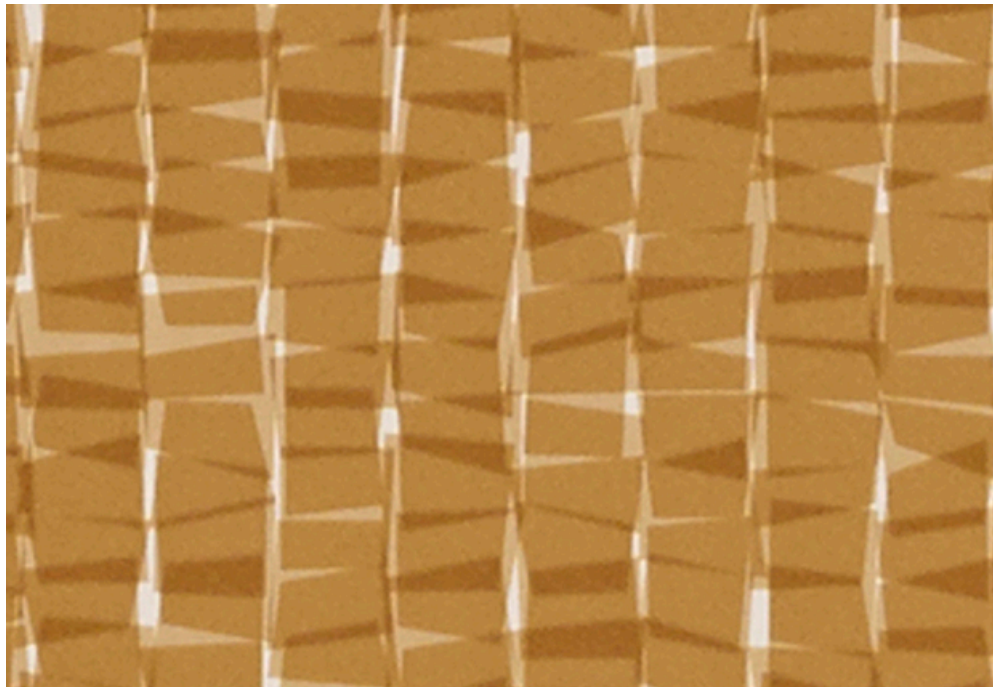

005 Fire Glaze

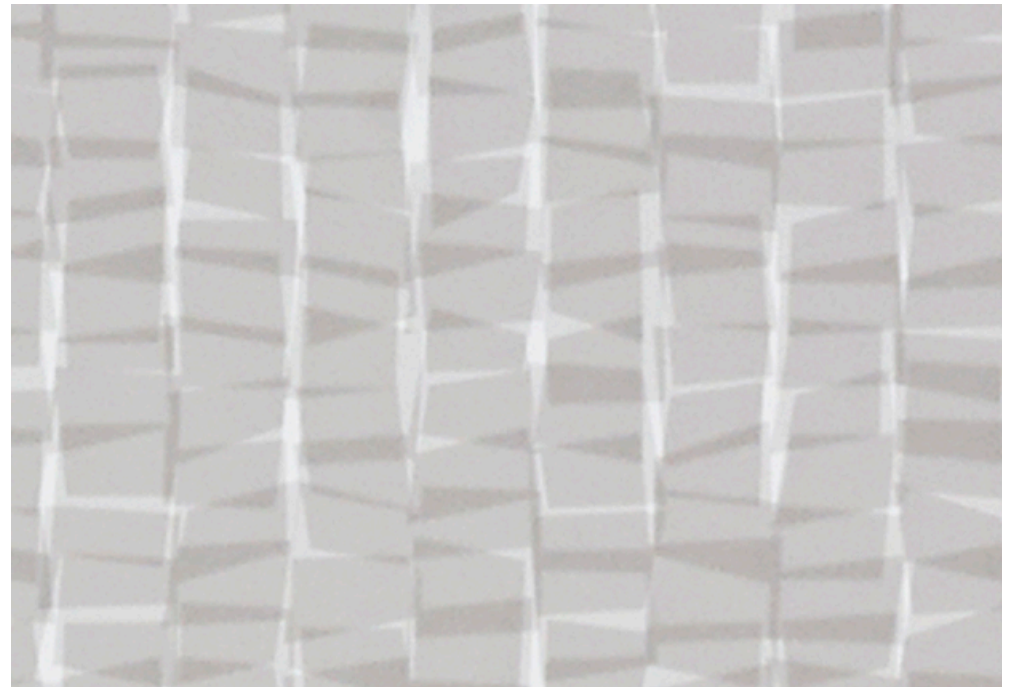

007 Silver

Design

Kari Pei

Application

Walls

Characteristics

Content: 100% Non-Phthalate Vinyl

Finish: Protective Topcoat

Backing: Polyester/Cotton Osnaburg

Width: 53" (135cm)

Bolt Size: 30 yards (27 m)

Class: Type II

Weight: 20 oz/ly (600 gr/lm)

Traffic: High Traffic

Country of Origin: USA

Note on Mold: Intended for use in buildings designed and maintained to avoid moisture on or within walls.

Application must conform to current Installation

Guidelines included in each shipment or available at maharam.com.

Price

\$42.50 / C\$64.25 (FOB destination)

C\$60.75 (FOB origin)

Testing

Flammability: ASTM E84 Adhered

CAN ULC S102 Adhered

Lightfastness: AATCC 16.3, 40+ hours



Maintenance

W-Clean with water-based cleanser.

Warranty

10 years. See Terms and Conditions for more information.

© 2014 Knoll, Inc.

Last updated August 2, 2025