

001 Tangent



002 Starstruck



003 Manuka



004 Poblano



005 Varsity



006 Freestyle




007 Sled



008 Delve



009 Queue

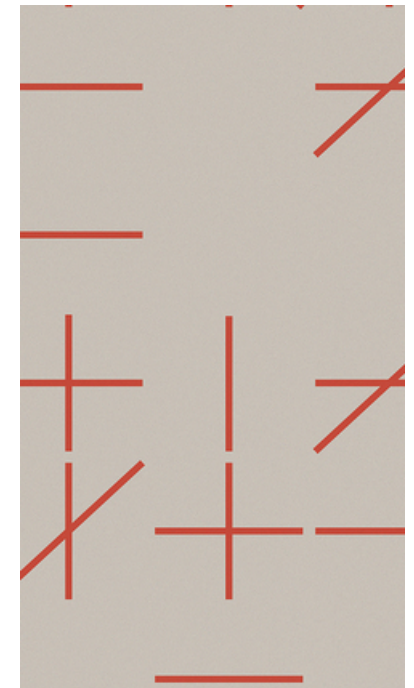

010 Pomodoro

300049 Score

maharam

Application

Walls

Characteristics

Content: 100% Cellulose
Finish: None
Backing: 84% Polyester, 16% Post-Consumer Recycled Polyester
Width: 52" (132cm)
Repeat: 24" V, 52" H
(61cm V, 132cm H)
Bolt Size: 30 yards (27 m)
Weight: 8.5 oz/ly (300 gr/lm)
Traffic: Moderate Traffic
Country of Origin: USA
Note: This product is available in custom colors for a minimum of 30 yards.
Note on Mold: Intended for use in buildings designed and maintained to avoid moisture on or within walls.
Application must conform to current Installation Guidelines included in each shipment or available at maharam.com.

Price


\$65.00 / C\$96.50 (FOB destination)
C\$93.00 (FOB origin)

Testing

Flammability: AS/NZS 3837 Adhered
ASTM E84 Adhered
CAN ULC S102 Adhered
EN 13501 Adhered*
ISO 5660 Adhered
*passes with additional treatment

Lightfastness: AATCC 16.3, 40+ hours


Maintenance

W-Clean with water-based cleanser.


Environmental

Greenguard Gold Certified
Healthier Hospitals Compliant
LBC Red List Free
Contains Bio-Based Content
FR Free
Free of Intentionally Added PFAS

Warranty

3 years. See Terms and Conditions for more information.

© 2019 Maharam

Last updated August 15, 2025