



001 Icicle



002 Canvas



003 Harbor



004 Firelight



005 Armadillo



006 Bronze




007 Riverbed




008 Frolic



009 Polished

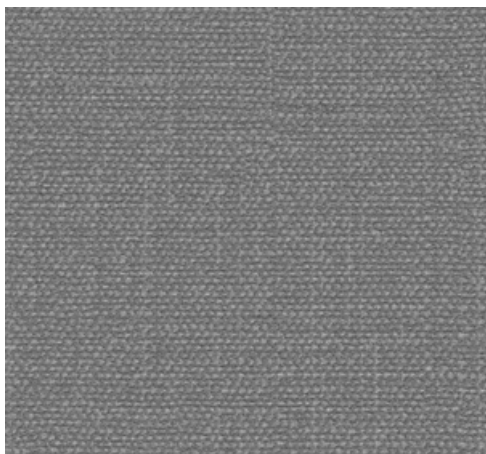

010 Stratosphere

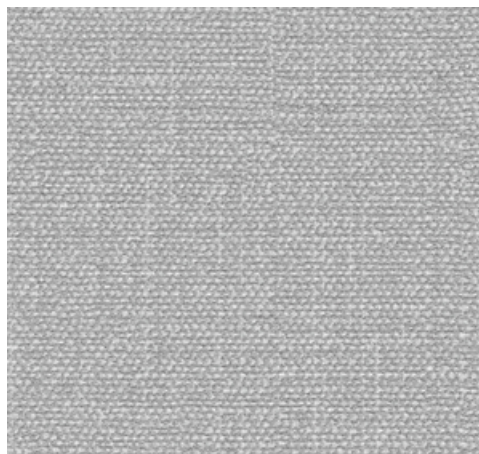

011 Tin



012 Shadow Box

Application

Walls

Characteristics


Content: 100% Vinyl
Finish: PFAS-Free Protective Topcoat
Backing: Polyester/Cotton Osnaburg
Width: 50" (127cm)
Bolt Size: 33 yards (30 m)
Class: Type II
Weight: 20 oz/ly (600 gr/lm)
Traffic: High Traffic
Country of Origin: Great Britain
Note on Mold: Intended for use in buildings designed and maintained to avoid moisture on or within walls.
Application must conform to current Installation Guidelines included in each shipment or available at maharam.com.

Price

\$27.00 / C\$42.25 (FOB destination)
C\$38.75 (FOB origin)

Testing

Flammability: ASTM E84 Adhered
CAN ULC S102 Adhered

Lightfastness: AATCC 16.3, 200+ hours


Maintenance

W-Clean with water-based cleanser.

Environmental

Free of Intentionally Added PFAS

Warranty

10 years. See Terms and Conditions for more information.

© 2019 Knoll, Inc.

Last updated June 16, 2025