




001 Spur



002 Squall

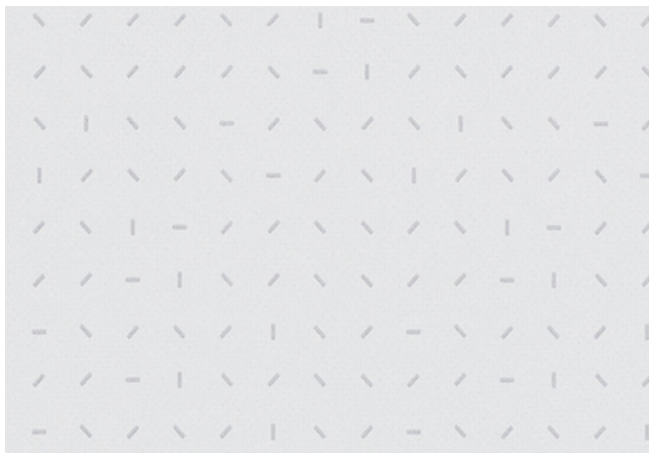


003 Fritter



004 Rouse



006 Sundried

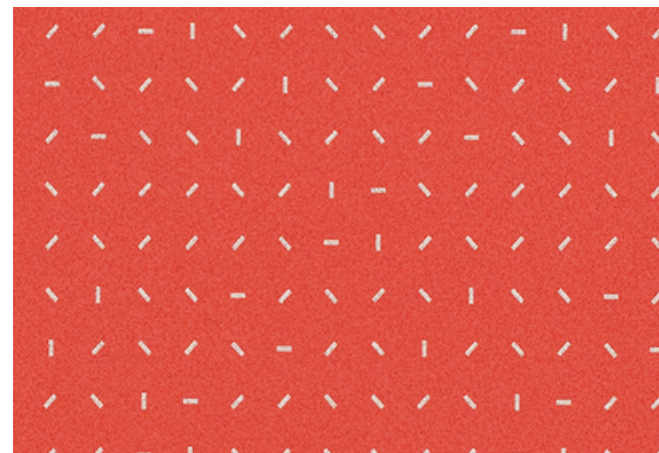

007 Fierce



008 Disco



010 Portage

399833 Spin

maharam

Application

Walls

Characteristics

Content: 100% Non-Phthalate Vinyl
Finish: Protective Topcoat
Backing: Polyester / Cellulose
Width: 52" (132cm)
Repeat: Non-match
Bolt Size: 30 yards (27 m)
Class: Type II
Weight: 20 oz/ly (600 gr/lm)
Traffic: High Traffic
Country of Origin: USA
Note on Mold: Intended for use in buildings designed and maintained to avoid moisture on or within walls.
Application must conform to current Installation Guidelines included in each shipment or available at maharam.com.

Price

\$40.00 / C\$60.75 (FOB destination)
C\$57.25 (FOB origin)

Testing

Flammability: AS/NZS 3837 Adhered
ASTM E84 Adhered
EN 13501 Adhered*
GB 8624 Adhered*
ISO 5660 Adhered
*passes with additional treatment

Lightfastness: AATCC 16.3, 200+ hours



Maintenance

W-Clean with water-based cleanser.

Environmental

FR Free
Free of Intentionally Added PFAS
Non-Phthalate Vinyl

Warranty

10 years. See Terms and Conditions for more information.

© 2016 Maharam

Last updated June 16, 2025