





001 Windmill



002 Comet

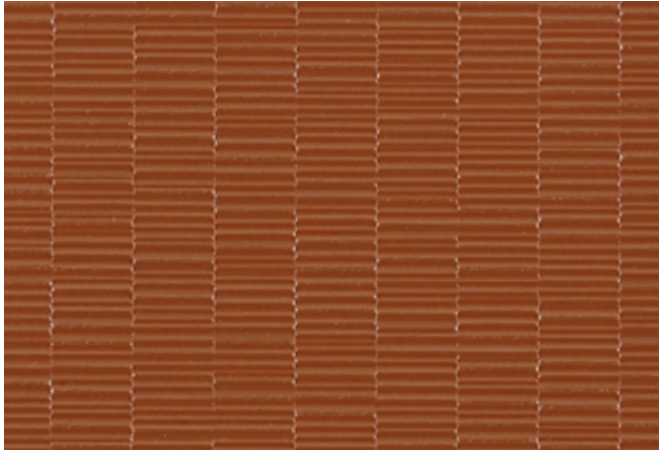

003 Spice

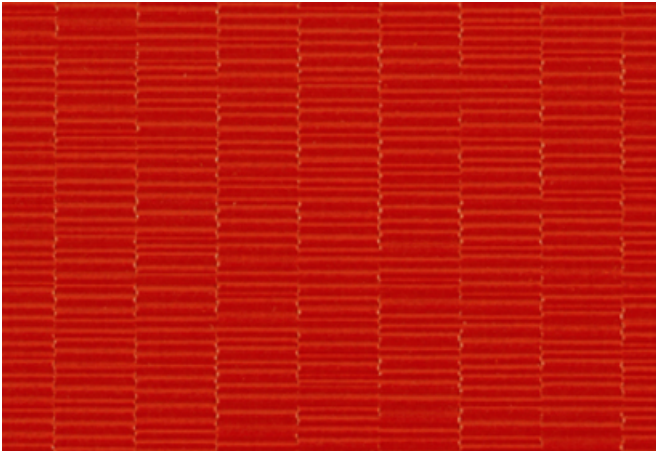

004 Burst




005 Flute



006 Foil



007 Platinum

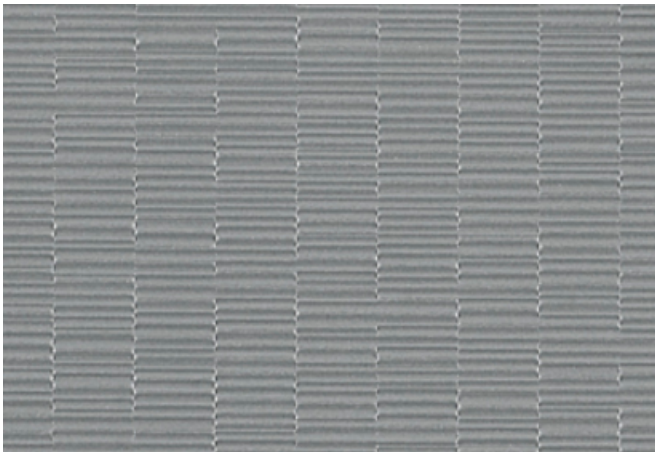

008 Alloy



009 Inkwell

Application

Walls

Characteristics

Content: 100% Non-Phthalate Vinyl
Finish: Protective Topcoat
Backing: Polyester/Cotton Osnaburg
Width: 52" (132cm)
Repeat: 26 1/2" V, 54" H
(67cm V, 137cm H)
Bolt Size: 30 yards (27 m)
Class: Type II
Weight: 20 oz/ly (600 gr/lm)
Traffic: High Traffic
Country of Origin: USA
Note on Mold: Intended for use in buildings designed
and maintained to avoid moisture on or within walls.
Application must conform to current Installation
Guidelines included in each shipment or available at
maharam.com.

Price

\$42.50 / C\$64.25 (FOB destination)
C\$60.75 (FOB origin)

Testing

Flammability: ASTM E84 Adhered
CAN ULC S102 Adhered

Lightfastness: AATCC 16.3, 40+ hours



Maintenance

W-Clean with water-based cleanser.

Environmental

Greenguard Certified
Non-Phthalate Vinyl

Warranty

10 years. See Terms and Conditions for more
information.

© 2013 Knoll, Inc.

Last updated August 2, 2025