


001 Atrous



002 Shadow

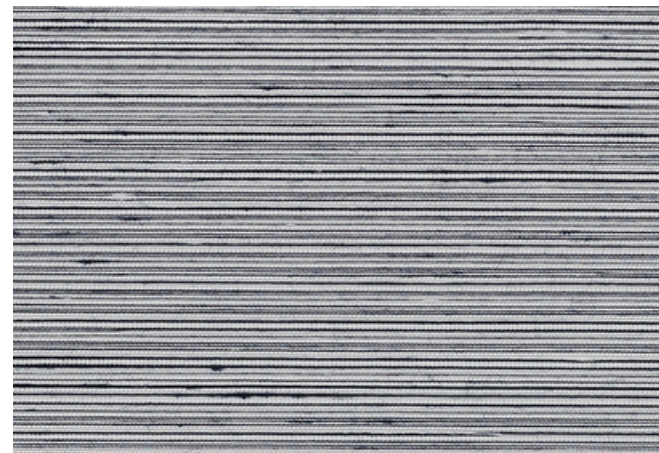

003 Compose



004 Flint



005 Morel




006 Natural



007 Rye



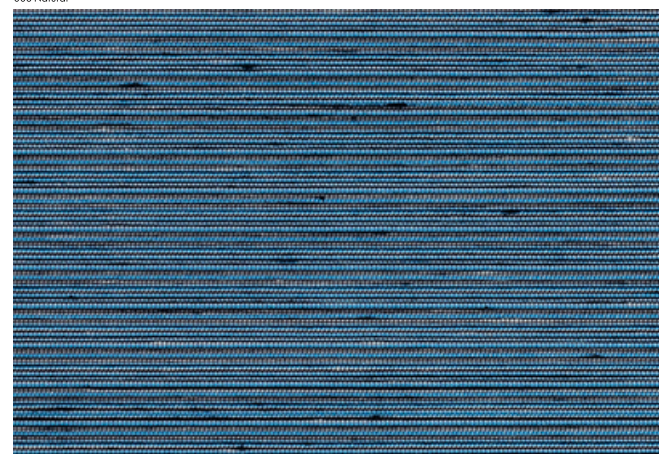

008 Cave



009 Riverboat

399832 Tenor

maharam

Application Walls	Price \$121.00 /	Maintenance X-Vacuum or brush lightly to remove surface dust. 
Characteristics Content: 92% Rayon, 8% Nylon Finish: PFAS-Free Water Repellent Backing: Cellulose / Polyester Width: 54" (137cm) Repeat: Non-match Bolt Size: 55 yards (50 m) Weight: 12.5 oz/ly (400 gr/lm) Traffic: Low Traffic Country of Origin: Netherlands Note on Mold: Intended for use in buildings designed and maintained to avoid moisture on or within walls. Application must conform to current Installation Guidelines included in each shipment or available at maharam.com.	Testing Flammability: ASTM E84 Adhered Lightfastness: AATCC 16.3, 40+ hours 	Environmental Greenguard Gold Certified REACH Compliant Contains Forest Stewardship Council (Fsc) Certified Content FR Free Warranty 1 year. See Terms and Conditions for more information. © 2016 Maharam Last updated June 16, 2025