Specifications Ursa 300181

Application Walls

Characteristics

Content: 88% Non-Phthalate Vinyl, 12% Post-Industrial Recycled Non-Phthalate Vinyl Finish: None Backing: Polyester/Cotton Osnaburg Width: 52" (132cm) Bolt Size: 30 yards (27 m) Class: Type II Weight: 20 oz/ly (600 gr/lm) Traffic: High Traffic Country of Origin: USA Note on Mold: Intended for use in buildings designed and maintained to avoid moisture on or within walls. Application must conform to current Installation Guidelines included in each shipment or available at maharam.com.

Price \$31.00 / C\$48.00 (FOB destination) / C\$44.50 (FOB origin)

MaintenanceW-Clean with water-based cleanser. \bowtie \bowtie \bowtie \bowtie \bowtie \bowtie \bowtie

Testing Flammability: ASTM E84 Adhered CAN ULC S102 Adhered

Lightfastness: AATCC 16.3, 200+ hours ▲ * * *

Specifications Ursa 300181


Environmental Greenguard Certified REACH Compliant Contains Recycled Content FR Free Free of Intentionally Added PFAS Non-Phthalate Vinyl Made In USA

Warranty

10 years.

© 2024 Knoll, Inc.

Complete product information at knolltextiles.com 800.645.3943

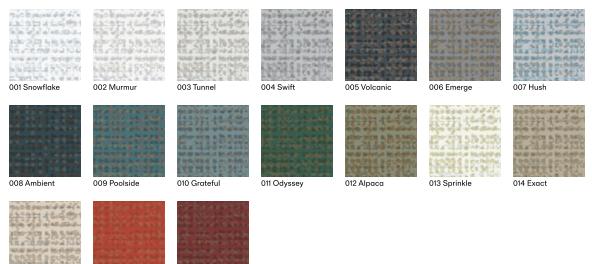

016 Lychee

017 Sangria

015 Arid