Specifications Winnow 466960

Application Seating

Characteristics

Content: 100% Polyurethane/Silicone Finish: PFAS-Free Ink-Resistant Protective Topcoat Backing: Polyester Width: 54" (137cm) Repeat: 6 3/4" V, 10 1/2" H (17cm V, 27cm H), Suitable for non-match application Railroaded Repeat: 10 1/2" V, 6 3/4" H (27cm V, 17cm H), Suitable for non-match application Bolt Size: 30 yards (27 m) Weight: 20 oz/ly (600 gr/lm) Country of Origin: Taiwan Note: Shown railroaded.

Price \$49.50 / C\$74.25 (FOB destination) / C\$70.75 (FOB origin)

Testing

Abrasion: ASTM D4157, 100,000 Double Rubs Note: Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

Flammability: BS 5852 Crib 5* CAL 117-2013 EN 1021-1* GB/T 17591* *passes with additional treatment

Lightfastness: AATCC 16.3, 200+ hours ▲ * * * *

Specifications Winnow 466960


Environmental Greenguard Gold Certified LBC Red List Free REACH Compliant DMF Free FR Free Free of Intentionally Added PFAS

Warranty

5 years.

© 2025 Maharam

Complete product information at knolltextiles.com 800.645.3943

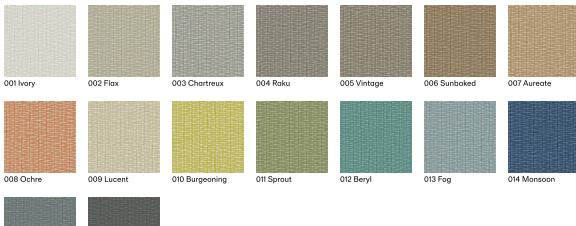

015 Flint

016 Grapple